

ACOUSTIC, SMOKE + FIRE SEALS


FINESSE™ SEALS

LP1504 Finesse™, LP2004 Finesse™


The Finesse™ seal offers the ultimate in acoustic, smoke and fire protection. This high-class seal offers performance and durability with a truly superb appearance. With clear fins as standard, it's ideal for luxury installations, where aesthetics are paramount. The seal is available in a range of sizes to cover 30 and 60 minute applications.




ACOUSTIC, SMOKE + FIRE SEALS



LP1504 Finesse™



LP2004 Finesse™

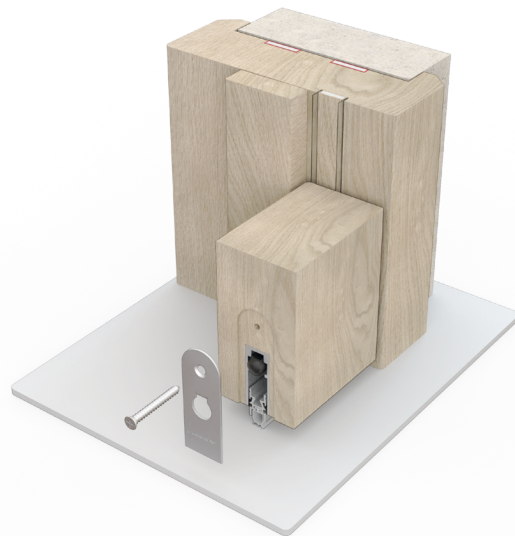

FD30 example:
Finesse™ offset to comply with Certifire CF341/330 (Shown with LAS8001 si)



FD60 example:
Finesse™ (Shown with LP1504 fire seal & LAS8001 si + cladding kit)

▶▶ **Note:** It's essential to consult the manufacturer to determine exactly what configuration of seal & size of seal have been tested.

SYSTEM SPECIFICATIONS

Test evidence

- ▶ Fire: BS 476-22:1987.
- ▶ Fire: BS EN 1634-1:2008.
- ▶ Smoke: BS 476-31.1:1983.
- ▶ Assessment: CNA/F14171.
- ▶ Acoustic: BS EN ISO 10140-2:2010.
- ▶ Durability: 100,000 cycles.

Performance

- ▶ Meets smoke requirements BS 9999:2017.
- ▶ Protects against sound, smoke, and fire.
- ▶ Low frictional resistance for ease of door operation.

Location

- ▶ Single and double leaf doors.

Size

- ▶ 15 x 4mm, 20 x 4mm.

Use with

- ▶ Any architectural seals.

Min/max gap size

- ▶ 3mm/4mm.

Seal material

- ▶ PVC encased sodium silicate and flexible elastomeric fins.

Standard lengths

- ▶ 1m and 2.1m.
- ▶ Other lengths to special order.

Fixing

- ▶ Heavy duty self-adhesive backing tape.

Finishes

- ▶ Available in a range of standard colours, plus woodgrain and metallic finishes available to special order.
- ▶ Clear fins as standard.

Certification