

AIR TRANSFER GRILLES

LVN25

HIGH PERFORMANCE NON-VISION STYLE INTUMESCENT AIR TRANSFER GRILLE

The LVN25 is a non-vision intumescent air transfer grille supplied in two halves to accommodate door thicknesses up to 50mm. When finished with a colour co-ordinated edge flange, it results in an attractive but efficient air transfer feature




Key benefits

- ▶ Louvred slats give privacy
- ▶ Bi-directional airflow
- ▶ No site testing necessary
- ▶ No moving parts
- ▶ Attractive facade on both sides
- ▶ Colour match available
- ▶ Easy to keep clean.

STANDARD SIZES AVAILABLE (MM)

WIDTH	98	148	198	248	298	348	398	448	498	598
HEIGHT	98	148	198	248	298	348	398	448	498	598

Other non-standard sizes may be available - please ask for details.

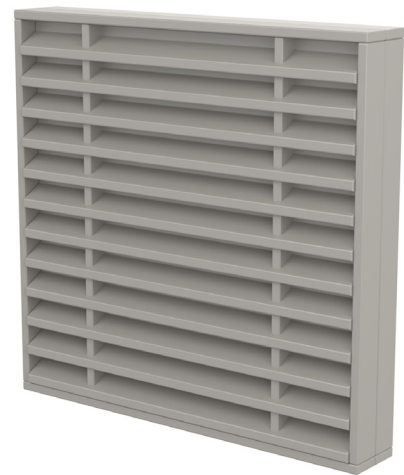

LVN25

FIRE + SMOKE RESISTANT AIR TRANSFER GRILLES

SYSTEM SPECIFICATIONS

Test evidence

- ▶ Fire: BS 476-20 & 22:1987.

Performance

- ▶ Can be used to provide up to 60 minutes resistance to fire.

Size

- ▶ Width: 100mm - 600mm (in 50mm increments).
- ▶ Height: 100mm - 600mm (in 50mm increments).

Thickness

- ▶ 2 pieces x 25mm.

Free area

- ▶ Approx 30% free area.

Material

- ▶ Rigid PVC slats with an intumescent core

Application

- ▶ Suitable for doors of minimum 50mm thickness.
- ▶ Note: in applications where high levels of humidity or wetness are anticipated, it is recommended that a LVH44 product should be employed.

Orientation

- ▶ LVN25 is best suited in the vertical plane.

Positional requirements (Certifire)

- ▶ The upper edge of the grille shall be no higher than 800mm from floor level.

Finish

- ▶ Silver as standard.

Fixing

- ▶ Each air transfer grille is manufactured 2mm less than a nominal aperture size to provide clearance when installed in a duct or other aperture of the same nominal dimensions. e.g. a 198mm x 198mm nominal size damper will suit a 200mm x 200mm aperture.
- ▶ Screwed and bedded in Lorient intumescent sealant.

Use with

- ▶ Integral steel or aluminium flanges.
- ▶ No cover grille required.

Accreditation

certifire
(CF564)